16(d) Bronze Asbestos Packed Water Level Gauge Flanged Ends, Right Hand Operated

Description

- NETA Bronze Asbestos Packed Water Level Gauge
- Flanged BS-10 Table ‘F’ Ends
- Right Hand Operated



Test Pressure

Max. BOP : 150 PSIG
Max. Working Temperature : 220°C
Test Pressure : 300 PSIG Hyd.

Certification

IBR Test Certificate in FORM III-C duly signed by the Director of Boilers, Punjab is provided.

Application : Steam, Water

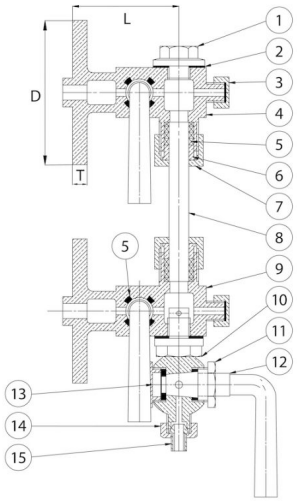
HSN : 84818020

Materials

PNo.	Part	Nos.	Material	Standard
1	Top Cover	1	Bronze	IBR 282[a][iv] Gr.B
2	Gasket	2	C.A.F.	IS:2712
3	Nut	2	Bronze	IBR 282[a][iv] Gr.B
4	Top Arm	1	Bronze	IBR 282[a][iv] Gr.B
5	Packing	–	Graphited Asbestos	–
6	Gland	2	Bronze	IBR 282[a][iv] Gr.B
7	Gland Nut	2	Bronze	IBR 282[a][iv] Gr.B
8	Glass Tube	1	Glass	–
9	Lower Arm	1	Bronze	IBR 282[a][iv] Gr.B
10	Drain Cock Body	1	Bronze	IBR 282[a][iv] Gr.B
11	Plug Nut	3	Bronze	IBR 282[a][iv] Gr.B
12	Plug	3	Bronze	IBR 282[a][iv] Gr.B
13	Adjusting Nut	3	Bronze	IBR 282[a][iv] Gr.B
14	Drain Nut	1	Bronze	IBR 282[a][iv] Gr.B
15	Nozzle	1	Bronze	IBR 282[a][iv] Gr.B

Dimensions

Nominal Size (Inches)	Nominal Size (mm)	L ±1.5	D ±1.0	T (Min)
1/2	15	70	95.3	9.5
5/8	16	95	101.6	9.5
3/4	20	95	101.6	9.5


L
D
T
1
2
3
4
5
6
7
8
5
9
10
11
12
13
14
15