NMW-16C S.S. Investment Casting Ball Valve Flanged Class-150

Description

- NETA Investment Casting S.S. (CF8) Ball Valve
- Design Standard: As per BS 5351
- Full bore, three piece design
- Lever Operated
- Low Operating Torque
- Flanges as per ASME B 16.5 Class-150



Test Pressure

Body : 450 PSIG Hyd.
Seat : 325 PSIG Hyd.

Certification

Our Works Test Certificate can be issued, if required.

Application : Water, Oil, Air

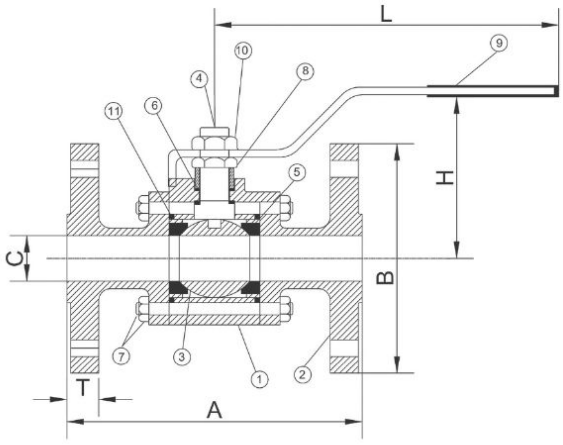
HSN : 84818010

Materials

PNo.	Part	Nos.	Material	Standard
1	Body	1	CF8	ASTM A351
2	Side Flanges	2	CF8	ASTM A351
3	Ball	1	S.S. 18% Cr.	AISI-304
4	Stem	1	S.S. 18% Cr.	AISI-304
5	Body Seat Ring	2	Teflon	ASTM D3294
6	Gland Packing	4	Teflon	ASTM D3294
7	Stud & Nut	4 & 8	Alloy Steel/H.T Steel	ASTM A193 Gr.B7 ASTM A194 Gr. 2H
8	Gland	1	S.S. 18% Cr.	AISI – 304
9	Lever	1	S.S./M.S.	AISI-304 IS:226
10	Lever Nut	1	S.S. 18% Cr.	AISI-304
11	Gasket	2	Teflon	ASTM D3294

Dimensions

Nominal Size (mm)	A±1.5	B	C	T(min)	L(approx.)	H(approx.)
15	108	89	12.5	10	145	65
20	117	98.5	19	10.5	145	68
25	127	108	25.4	11.2	180	78
40	165	127	38	14.5	240	98
50	178	152.5	51	16	240	108


L
H
C
B
T
A
1
2
3
4
5
6
7
8
9
10
11